

FERIA

FERIA



34-39%
EN ISO 14021

Recycled Content



≥85%*
EN ISO 7742-2 & 3

Light Reflectance

FERIA

BOARD



Prelude XL²/TLX 24 mm
Prelude Sixty²




14mm

TEGULAR



Prelude XL²/TLX 24 mm
Prelude Sixty²



9.5mm

14mm

15°

6.5mm

FERIA

600 x 600 x 14 mm

2105 M

2107 M

600 x 1200 x 14 mm

2106 M

FERIA Unperforated

600 x 600 x 14 mm

2614 M

2616 M

600 x 1200 x 14 mm

2615 M



EN ISO 354 &
EN ISO 11654

α_w NRC 125 250 500 1000 2000 4000 Hz

• FERIA


0.50 0.50 0.35 0.40 0.50 0.60 0.55 0.50 α_p

• FERIA Unperforated

0.15(L) 0.15 0.30 0.25 0.15 0.10 0.10 0.20 α_p

Sound Absorption Class = D

Sound Absorption Class = E (Unperforated)

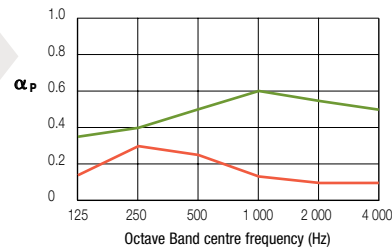

EN ISO 10848-2
/ EN 20140-9
& EN ISO 717-1

Dncw

32 dB



EN 13501-1

EEA Euroclass A2-s1, d0



EN 12667
& ISO 8301

$\lambda = 0.06$ W/m K



90 % RH



≈ 3.5 kg/m²

* FERIA 84%; FERIA Unperforated 85%

Please contact our Armstrong Technical Sales group for further details.

www.armstrong.eu

Armstrong®