

OPTIMA

OPTIMA



OPTIMA


	BOARD	TEGULAR	MICROLOOK	VECTOR
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm Silhouette XL ² 15 mm	 Prelude XL ² 24 mm Prelude Sixty ²
OPTIMA 15 mm				
600 x 600 x 15 mm	2327 M	2329 M	2331 M	
600 x 1200 x 15 mm	2328 M	2330 M	2332 M	
OPTIMA 20 mm				
600 x 600 x 20 mm	2335 M	2349 M	2363 M	
600 x 1200 x 20 mm			2364 M	
600 x 1800 x 20 mm	2337 M			
1200 x 1200 x 20 mm	2338 M	2352 M	2366 M	
OPTIMA 22 mm				
600 x 600 x 22 mm				2387 M
600 x 1200 x 22 mm				3413 M
OPTIMA 25 mm				
600 x 600 x 25 mm	2379 M	2381 M	2383 M	



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz	
• Board, Tegular, MicroLook 15 mm	0.90	0.90	0.35	0.75	1.00	0.80	0.90	0.95	α_p
• Board, Tegular, MicroLook 20 mm	0.95	0.95	0.40	0.80	1.00	0.85	1.00	1.00	α_p
• Board, Tegular, MicroLook 25 mm	1.00	1.00	0.50	0.85	1.00	0.95	1.00	1.00	α_p
• Vector 22 mm	1.00	0.95	0.35	0.80	1.00	0.90	1.00	1.00	α_p

Sound Absorption Class = A

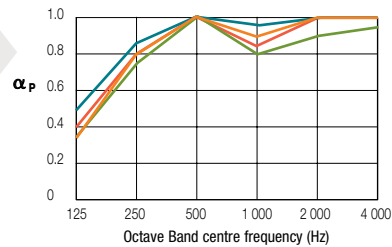

EN ISO 10848-2 & EN ISO 717-1

D_{nfw} 24 dB (OPTIMA 25 mm)



EN ISO 140-3 & EN ISO 717-1

R_w 7 dB (OPTIMA 15 mm)
--



EEA Euroclass A2-s1, d0
EN 13501-1

RUS KM1 (G1, V1, D1, T1)
FZ 123



EN 12667 & ISO 8301

$\lambda = 0.032$ W/m K



95 % RH



30 YEAR system guarantee



15 mm: 1.8 kg/m ²
20 mm: 2.3 kg/m ²
22 mm: 2.9 kg/m ²
25 mm: 2.8 kg/m ²

Please contact the Armstrong Technical Sales group for further details.

www.armstrong.eu